

05/23/00  
 1580 U.S. PTO

Please type a plus sign (+) inside this box → ☒

PTO/SB/05 (4/98)  
 Approved for use through 09/30/2000. OMB 0651-0032  
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small>	Attorney Docket No.	PP13US
	First Inventor or Application Identifier	Kia Silverbrook
	Title	TIMER MODULE FOR COMPACT PRINTER SYSTEM
	Express Mail Label No.	

<b>APPLICATION ELEMENTS</b> <small>See MPEP chapter 600 concerning utility patent application contents.</small>	<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) <small>(Submit an original and a duplicate for fee processing)</small>	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages <b>21</b> ] <small>(preferred arrangement set forth below)</small> - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission <small>(if applicable, all necessary)</small> a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets <b>12</b> ]	<b>ACCOMPANYING APPLICATION PARTS</b> 7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement <input type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small> 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small> 13. <input checked="" type="checkbox"/> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired <small>(PTO/SB/09-12)</small> 14. <input type="checkbox"/> Certified Copy of Priority Document(s) <small>(if foreign priority is claimed)</small> 15. <input type="checkbox"/> Other:
4. Oath or Declaration [Total Pages <b>3</b> ] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) <small>(for continuation/divisional with Box 16 completed)</small> i. <input type="checkbox"/> <b>DELETION OF INVENTOR(S)</b> Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	
<b>NOTE FOR ITEMS 1 &amp; 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).</b>	

16. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a preliminary amendment.

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

**For CONTINUATION or DIVISIONAL APPS only:** The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**17. CORRESPONDENCE ADDRESS**

☒ Customer Number or Bar Code Label **24011** or ☐ Correspondence address below  
(Insert Customer No. or Attach bar code label here)

Name	Kia Silverbrook				
	Silverbrook Research Pty Ltd				
Address	393 Darling Street				
City	Balmain	State	NSW	Zip Code	2041
Country	AUSTRALIA	Telephone	61-2-9818-6633	Fax	61-2-9818-6711

Name (Print/Type)	Kia Silverbrook	Registration No. (Attorney/Agent)	
Signature		Date	May 16, 2000

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**STATEMENT CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number (Optional)  
PP13US

Applicant, Patentee, or Identifier: Silverbrook Research Pty Ltd

Application or Patent No.: \_\_\_\_\_

Filed or Issued: May, 2000

Title: TIMER MODULE FOR COMPACT PRINTER SYSTEM

I hereby state that I am

- ☒ the owner of the small business concern identified below:  
☐ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN Silverbrook Research Pty. Ltd.

ADDRESS OF SMALL BUSINESS CONCERN 393 Darling Street, Balmain, NSW 2041, Australia

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.  
☐ the application identified above.  
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☒ no such person, concern, or organization exists.  
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person/concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING Kia Silverbrook

TITLE OF PERSON IF OTHER THAN OWNER \_\_\_\_\_

ADDRESS OF PERSON SIGNING 393 Darling Street, Balmain, NSW 2041, Australia

SIGNATURE  DATE May 16, 2000

## TIMER MODULE FOR COMPACT PRINTER SYSTEM

### FIELD OF THE INVENTION

5 The invention relates to a timer module useful in a digital imaging system. It is useful for controlling image capture by a digital image sensor or camera. The timer module finds particular application in a compact printer system able to print full-color, business card size documents from a device about the size of a pen.

10 Reference may be had to co-pending applications claiming priority from Australian Provisional Patent Application number PQ0560 dated 25 May 1999. The co-pending applications describe related modules and methods for implementing the compact printer system. The co-pending applications are as follows:

USSN	Docket No.	Title
TBA	PP01	Compact Color Printer Module
TBA	PP02	Modular Compact Printer System
TBA	PP03	Nozzle Capping Mechanism
TBA	PP04	Ink Cartridge for Compact Printer System
TBA	PP07	Controller for Printer Module
TBA	PP08	Camera Module for Compact Printer System
TBA	PP09	Image Processor for Camera Module
TBA	PP10	Memory Module for Compact Printer System
TBA	PP11	Effects Module for Compact Printer System
TBA	PP12	Effects Processor for Effects Module
TBA	PP15	Color Conversion Method for Compact Printer System
TBA	PP16	Method and Apparatus of Dithering
TBA	PP17	Method and Apparatus of Image Conversion

### BACKGROUND OF THE INVENTION

15 Microelectronic manufacturing techniques have led to the miniaturization of numerous devices. Mobile phones, personal digital assistant devices, and digital cameras are very common examples of the miniaturization trend.

One device that has not seen the advantage of microelectronic manufacturing techniques is the printer. Commercially available printers are large compared to many of the devices they could support. For instance, it is impractical to carry a color printer for the purpose of instantly printing photographs taken with known compact digital cameras.

20 A compact printhead has been described in co-pending United States Patent Applications filed simultaneously to the present application and hereby incorporated by cross reference:

USSN	Docket No.	Title
TBA	MJ62	Fluidic seal for an ink jet nozzle assembly
TBA	IJ52	Ink jet printhead having a moving nozzle with an externally arranged actuator
TBA	IJM52	Method of manufacture of an ink jet printhead having a moving nozzle with an externally arranged actuator
TBA	MJ63	Ink jet printhead nozzle array
TBA	MJ58	Nozzle guard for an ink jet printhead

Some cameras have self-timers that allow a user time to move into frame before a photo is taken. Self-timers are only useful for capturing a single image. Some cameras also have the facility for taking multiple frames but this generally requires the user to maintain pressure on a 'take' button. In any event, the timers are built in to the camera and have fixed functionality.

## SUMMARY OF THE INVENTION

In one form, the invention resides in a timer module comprising:  
a body;  
control means within said body that automates the capture of multiple images by a camera module, the capture of each image being separated by a specific time interval;  
at least one connection means incorporated in said body for connecting said timer module to a bus providing power and data between said timer module and said camera module.

In a further form the invention resides in a timer module for a compact printer system comprising:

a body;  
control means within said body that automates the capture of multiple images by a connected camera module, the capture of each image being separated by a specific time interval;  
at least one connection means incorporated in said body for connecting said effects module to a bus providing power and data between said effects module and said camera module.

In a still further form the invention resides in a method of automating the capture of multiple images by a camera module in a compact printer system comprising the steps of:

setting a specific time interval between said capture of said images,

setting an initial image number on a connected memory module,  
starting said image capture process.

Further features of the invention will be evident from the following  
description.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

In order to assist with describing preferred embodiments of the invention,  
reference will be made to the following figures in which:

- FIG 1 is a printer module;
- 10 FIG 2 is a camera module;
- FIG 3 is a memory module;
- FIG 4 is a communication module;
- FIG 5 is a flash module;
- FIG 6 is a timer module;
- 15 FIG 7 is a laser module;
- FIG 8 is an effects module;
- FIG 9 is a characters module;
- FIG 10 is an adaptor module;
- FIG 11 is a pen module;
- 20 FIG 12 is a dispenser module;
- FIG 13 is a first compact printer configuration;
- FIG 14 is a second compact printer configuration;
- FIG 15 is a third compact printer configuration;
- FIG 16 is a fourth compact printer configuration;
- 25 FIG 17 is a perspective view of the timer module;
- FIG 18 is an exploded view of the timer module; and
- FIG 19 is a block schematic diagram of a processor for the timer module.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

- 30 The invention is described in terms of the application to a compact printer system. It will be understood that the invention is not limited to this particular application but rather can be employed with any digital imaging system. Nonetheless, the compact printer system provides a convenient environment in which to describe the details of the timer module invention.

Referring to FIGs 1 to 12, there are shown various modules that together form a compact printer system. Individual modules can be attached and detached from the compact printer configuration to allow a user-definable solution to business-card sized printing. Images can also be transferred from one compact printer to another without the use of a secondary computer system. Modules have a minimal user-interface to allow straightforward interaction.

A compact printer system configuration consists of a number of compact printer modules connected together. Each compact printer module has a function that contributes to the overall functionality of the particular compact printer configuration. Each compact printer module is typically shaped like part of a pen, physically connecting with other compact printer modules to form the complete pen-shaped device. The length of the compact printer device depends on the number and type of compact printer modules connected. The functionality of a compact printer configuration depends on the compact printer modules in the given configuration.

The compact printer modules connect both physically and logically. The physical connection allows modules to be connected in any order, and the logical connection is taken care of by the compact printer Serial Bus - a bus that provides power, allows the modules to self configure and provides for the transfer of data.

In terms of physical connection, most compact printer modules consist of a central body, a male connector at one end, and a female connector at the other. Since most modules have both a male and female connector, the modules can typically be connected in any order. Certain modules only have a male or a female connector, but this is determined by the function of the module. Adaptor modules allow these single-connector modules to be connected at either end of a given compact printer configuration.

A four wire physical connection between all the compact printer modules provides the logical connection between them in the form of the compact printer Serial Bus. The compact printer Serial Bus provides power to each module, and provides the means by which data is transferred between modules. Importantly, the compact printer Serial Bus and accompanying protocol provides the means by which the compact printer system auto-configures, reducing the user-interface burden on the end-user.

Compact printer modules can be grouped into three types:

- image processing modules including a Printer Module (FIG 1),

a Camera Module (FIG 2), and a Memory Module (FIG 3). Image processing modules are primarily what sets the compact printer system apart from other pen-like devices. Image processing modules capture, print, store or manipulate photographic images;

• housekeeping modules including an Adapter Module (FIG 10), an Effects Module (FIG 8), a Communications Module (FIG 4), and a Timer Module (FIG 6). Housekeeping modules provide services to other modules or extended functionality to other modules; and

• isolated modules including a Pen Module (FIG 11) and a Laser Module (FIG 7). Isolated modules are those that attach to the compact printer system but are completely independent of any other module. They do not necessarily require power, and may even provide their own power. Isolated Modules are defined because the functionality they provide is typically incorporated into other pen-like devices.

Although housekeeping modules and isolated modules are useful components in a compact printer system, they are extras in a system dedicated to image processing and photographic manipulation. Life size (1:1) illustrations of the compact printer modules are shown in FIGs 1 to 12, and example configurations produced by connecting various modules together are shown in FIGs 13 to 16.

FIG 1 shows a printer module that incorporates a compact printhead described in co-pending United States Patent Applications listed in the Background section of this application, incorporated herewith by reference, and referred to herewith as a Memjet printhead. The Memjet printhead is a drop-on-demand 1600 dpi inkjet printer that produces bi-level dots in up to 4 colors to produce a printed page of a particular width. Since the printhead prints dots at 1600 dpi, each dot is approximately 22.5µm in diameter, and spaced 15.875µm apart. Because the printing is bi-level, the input image should be dithered or error-diffused for best results. Typically a Memjet printhead for a particular application is page-width. This enables the printhead to be stationary and allows the paper to move past the printhead. A Memjet printhead is composed of a number of identical 1/2 inch Memjet segments.

The printer module 10 comprises a body 11 housing the Memjet printhead. Power is supplied by a three volt battery housed in battery compartment 12. The printhead is activated to commence printing when a business card (or similar sized printable media) is inserted into slot 13. Male connector 14 and female connector 15 facilitate connection of other modules to the printer module 10.

FIG 2 shows a camera module 20. The camera module provides a point-and-shoot camera component to the compact printer system as a means of capturing images. The camera module comprises a body 21 having a female connector 22. A lens 23 directs an image to an image sensor and specialized image processing chip within the camera 24. A conventional view finder 25 is provided as well as a lens cap 26. An image is captured when the Take button 27 is pushed. Captured images are transferred to the Printer Module 10 for subsequent printing, manipulation, or storage. The Camera Module also contains a self-timer mode similar to that found on regular cameras.

FIG 3 shows a Memory Module 30 comprising a body 31, LCD 32, IN button 33, OUT button 34 and SELECT button 35. The Memory Module 30 is a standard module used for storing photographic images captured by the Camera 20. The memory module stores 48 images, each of which can be accessed either at full resolution or at thumbnail resolution. Full resolution provides read and write access to individual images, and thumbnail resolution provides read access to 16 images at once in thumbnail form.

The Memory Module 30 attaches to other modules via a female connector 36 or male connector 37. The male and female connectors allow the module to be connected at either end of a configuration. Power may be provided from the Printer Module 10 via the Serial Bus or from another source, such as a separate power module.

A Communications Module 40 is shown in FIG 4. The communications module 40 consists of a connector 41 and a cable 42 that terminates in an appropriate connector for a computer port, such as a USB port, RS232 serial port or parallel port. The Communications Module 40 allows the compact printer system to be connected to a computer. When so connected, images can be transferred between the computer and the various modules of the compact printer system. The communications module allows captured images to be downloaded to the computer, and new images for printing to be uploaded into the printer module 10 and the memory module 30.

A Flash Module 50 is shown in FIG 5. The Flash Module 50 is used to generate a flash with flash cell 51 when taking photographs with the Camera Module 20. The Flash Module attaches to other modules via female connector 52 and male connector 53. It contains its own power source. The Flash Module is automatically



selected by the Camera Module when required. A simple switch allows the Flash Module to be explicitly turned off to maximize battery life.

FIG 6 shows a Timer Module 60 that is used to automate the taking of multiple photos with the Camera Module 20, each photo separated by a specific time interval. The captured photos are stored in Memory Module 30. Any flash requirements are handled by the Camera Module 20, and can therefore be ignored by the Timer Module. The Timer Module 60 consists of a body 61 housing an optional LCD 62, START/STOP button 63 and UNITS button 64. The LCD is optional since data from the Timer Module could be sent on the serial bus to a specific display module. Nonetheless, it is convenient to consider the LCD as part of the Timer Module.

A SELECT button 65 allows the user to select time units and the number of units are set by UNITS button 64. The Timer Module 60 includes a male connector 66 and female connector 67. The Timer Module takes its power from the Printer Module 10 via the Serial Bus or from another source, such as a separate power module.

A Laser Module 70 is shown in FIG 7. The Laser Module 70 consists of a body 71 containing a conventional laser pointer operated by button 72. As the Laser Module is a terminal module it only has one connector, which in the example is a male connector 73. The Laser Module is an isolated module, in that it does not perform any image capture, storage, or processing. It exists as a functional addition to the compact printer system. It is provided because laser pointer services are typically incorporated into other pen-like devices. The Laser Module contains its own power supply and does not appear as a device on the Serial Bus.

The Effects Module shown in FIG 8 is an image processing module. It allows a user to select a number of effects and applies them to the current image stored in the Printer Module 10 or memory module 30. The effects include borders, clip-art, captions, warps, color changes, and painting styles. The Effects Module comprises a body 81 housing custom electronics and a LCD 82. A CHOOSE button 83 allows a user to choose between a number of different types of effects. A SELECT button 84 allows the user to select one effect from the number of effects of the chosen type. Pressing the APPLY button 85 applies the effect to image stored in the Printer Module 10. The Effects Module obtains power from the Serial Bus. Male connector 86 and female connector 87 allow the Effects Module to be connected to other compact printer system modules.

FIG 9 shows a Character Module 90 that is a special type of Effects Module (described above) that only contains character clip-art effects of a given topic or genre. Examples include The Simpsons<sup>®</sup>, Star Wars<sup>®</sup>, Batman<sup>®</sup>, and Dilbert<sup>®</sup> as well as company specific modules for McDonalds<sup>®</sup> etc. As such it is an image processing module. It consists of a body 91 housing custom electronics and a LCD 92. SELECT button 93 allows the user to choose the effect that is to be applied with APPLY button 94. The Character Module obtains power from the Serial Bus through male connector 95 and female connector 96.

The Adaptor Module 100, shown in FIG 10, is a female/female connector that allows connection between two modules that terminate in male connectors. A male/male connector (not shown) allows connection between two modules that terminate in female connectors. The Adaptor Module is a housekeeping module, in that it facilitates the use of other modules, and does not perform any specific processing of its own.

All "through" modules have a male connector at one end, and a female connector at the other end. The modules can therefore be chained together, with each module connected at either end of the chain. However some modules, such as the Laser Module 70, are terminating modules, and therefore have either a male or female connector only. Such single-connector modules can only be connected at one end of the chain. If two such modules are to be connected at the one time, an Adaptor Module 100 is required.

FIG 11 shows a Pen Module 110 which is a pen in a module form. It is an isolated module in that it attaches to the compact printer system but is completely independent of any other module. It does not consume or require any power. The Pen Module is defined because it is a convenient extension of a pen shaped, pen sized device. It may also come with a cap 111. The cap may be used to keep terminating connectors clean in the case where the chain ends with a connector rather than a terminating module.

To assist with accurately feeding a business card sized print media into slot 13 of the printer module 10, a dispenser module 120 is provided as shown in FIG12. The dispenser module 120 comprises a body 121 that holds a store of business card sized print media. A Printer Module 10 locates into socket 122 on the dispenser module

120. When correctly aligned, a card dispensed from the dispenser module by slider 123 enters slot 13 and is printed.

In the sense that a minimum configuration compact printer system must be able to print out photos, a minimum compact printer configuration contains at least a Printer Module 10. The Printer Module holds a single photographic image that can be printed out via its Memjet printer. It also contains the 3V battery required to power the compact printer system.

In this minimum configuration, the user is only able to print out photos. Each time a user inserts a business card 130 into the slot in the Printer Module, the image in the Printer Module is printed onto the card. The same image is printed each time a business card is inserted into the printer. In this minimum configuration there is no way for a user to change the image that is printed. The dispenser module 120 can be used to feed cards 130 into the Printer Module with a minimum of fuss, as shown in FIG 13.

By connecting a Camera Module 20 to the minimum configuration compact printer system the user now has an instant printing digital camera in a pen, as shown in FIG 14. The Camera Module 20 provides the mechanism for capturing images and the Printer Module 10 provides the mechanism for printing them out. The battery in the Printer Module provides power for both the camera and the printer.

When the user presses the "Take" button 27 on the Camera Module 20, the image is captured by the camera 24 and transferred to the Printer Module 10. Each time a business card is inserted into the printer the captured image is printed out. If the user presses "Take" on the Camera Module again, the old image in the Printer Module is replaced by the new image.

If the Camera Module is subsequently detached from the compact printer system, the captured image remains in the Printer Module, and can be printed out as many times as desired. The Camera Module is simply there to capture images to be placed in the Printer Module.

FIG 15 shows a further configuration in which a Memory Module 30 is connected to the configuration of FIG 14. In the embodiment of FIG 15, the user has the ability to transfer images between the Printer Module 10 and a storage area contained in the Memory Module 30. The user selects the image number on the Memory Module, and then either sends that image to the Printer Module (replacing whatever image was already stored there), or brings the current image from the Printer

Module to the specified image number in the Memory Module. The Memory Module also provides a way of sending sets of thumbnail images to the Printer Module.

Multiple Memory Modules can be included in a given system, extending the number of images that can be stored. A given Memory Module can be disconnected from one compact printer system and connected to another for subsequent image printing.

With the Camera Module 20 attached to a Memory Module/Printer Module compact printer system, as shown in FIG 15, the user can "Take" an image with the Camera Module, then transfer it to the specified image number in the Memory Module. The captured images can then be printed out in any order.

By connecting a Communications Module 40 to the minimum configuration compact printer system, the user gains the ability to transfer images between a PC and the compact printer system. FIG 16 shows the configuration of FIG 15 with the addition of a Communications Module 40. The Communications Module makes the Printer Module 10 and any Memory Modules 30 visible to an external computer system. This allows the download or uploading of images. The communications module also allows computer control of any connected compact printer modules, such as the Camera Module 20.

Each module is visible on the Serial Bus. Each module is self identifying and self-configuring using standard USB protocols. Apart from the standard protocol functions (including identification), there are a number of functions to which each module is also capable of responding. These are outlined in Table 1. Each module also has a number of module-specific functions. These commands allow the modules to be controlled by an external device, such as a personal computer, and by other modules.

Table 1. Basic Module Functions	
Name	Description
GetImageCounts()	Returns two counts - the number of images that can be read from the module, and the number of images that can be written to the module. This allows read only, write only, and virtual read only images.
GetCurrentImageNumber	If the module has a setting for the image number, this call returns the current image number.
GetImageAccessMethods	Returns two sets of 8 access bits. The first set represents the read access bits, and the second set represents the write access bits. See Table 2 for an interpretation of the bits.

GetImage(N, Mode)	Returns image number N using the specified 8-bit access mode. See Table 3 for an interpretation of the access mode bits.
StoreImage(N, Mode)	Stores an image at address N using the specified 8-bit access mode. See Table 3 for an interpretation of the access mode bits.
TransferImage(N1, Mode, Dest, N2)	Transfers the image at address N1 using the specified 8-bit access mode to the image at address N2 at the serial device with id Dest. See Table 3 for an interpretation of the access mode bits.

The 8-bit mode returned by GetImageAccessMethods is interpreted as follows:

Table 2. 8-bit return code from GetImageAccessMethods	
Bit	Interpretation
0	Access 850 x 534 permitted
1	Access 534 x 850 permitted
2	Interleaved L*a*b* permitted
3	Planar L*, a*, b* permitted
4-7	Reserved, and 0

5 The 8-bit mode used for image read and write access via GetImage, StoreImage and TransferImage is interpreted as follows:

Table 3. 8-bit code used for read & write access	
Bit	Interpretation
0	Orientation: 0 = 850 x 534, 1 = 534 x 850
1	0 = interleaved, 1 = planar
2-3	Color plane (valid only when bit 1 = planar) 00 = L*, 01 = a*, 10 = b*, 11 = reserved
4-7	Reserved, and 0

10 In some situations, certain modules may be configured without the printer module. For example, it may be convenient to configure a camera module 20 and a memory module 30 for capturing and storing images for later printing by the printer module 10. The timer module 60 and the flash module 50 may be added to the camera module 20 and memory module 30 to produce a digital camera having many of the features of a conventional camera. Additional memory modules can easily be added to provide virtually unlimited memory storage.

15 The above commands allow images to be transferred to and from the modules without going through the printer module. For example, the Memory Module 30 can act under control of the Timer Module 60 to transfer a captured image from the

Camera Module 20 to the Memory Module 30 using the TransferImage command. The Camera Module 20 will have a module specific 'capture' command for capturing an image.

5 In the general case, the Printer Module holds the "current" image, and the other modules function with respect to this central repository of the current image. The Printer Module is therefore the central location for image interchange in the compact printer system, and the Printer Module provides a service to other modules as specified by user interaction.

10 A given module may act as an image source. It therefore has the ability to transfer an image to the Printer Module. A different module may act as an image store. It therefore has the ability to read the image from the Printer Module. Some modules act as both image store and image source. These modules can both read images from and write images to the Printer Module's current image.

15 The standard image type has a single conceptual definition. The image definition is derived from the physical attributes of the printhead used in the Printer Module. The printhead is 2 inches wide and prints at 1600dpi in cyan, magenta and yellow bi-level dots. Consequently a printed image from the compact printer system is 3200 bi-level dots wide.

20 The compact printer system prints on business card sized pages (85mm x 55mm). Since the printhead is 2 inches wide, the business cards are printed such that 1 line of dots is 2 inches. 2 inches is 50.8mm, leaving a 2mm edge on a standard business-card sized page. The length of the image is derived from the same card size with a 2mm edge. Consequently the printed image length is 81mm, which equals 5100 1600dpi dots. The printed area of a page is therefore 81mm x 51mm, or 5100 x 25 3200 dots.

To obtain an integral contone to bi-level ratio a contone resolution of 267 ppi (pixels per inch) is chosen. This yields a contone CMY page size of 850 x 534, and a contone to bi-level ratio of 1:6 in each dimension. This ratio of 1:6 provides no perceived loss of quality since the output image is bi-level.

30 The printhead prints dots in cyan, magenta, and yellow ink. The final output to the printed page must therefore be in the gamut of the printhead and take the attributes of the inks into account. It would at first seem reasonable to use the CMY color space to represent images. However, the printer's CMY color space does not have a linear response. This is definitely true of pigmented inks, and partially true for dye-based

inks. The individual color profile of a particular device (input and output) can vary considerably. Image capture devices (such as digital cameras) typically work in RGB (red green blue) color space, and each sensor will have its own color response characteristics.

5           Consequently, to allow for accurate conversion, as well as to allow for future image sensors, inks, and printers, the CIE  $L^*a^*b^*$  color model [CIE, 1986, CIE 15.2 Colorimetry: Technical Report (2<sup>nd</sup> Edition), Commission Internationale De l'Eclairage] is used for the compact printer system.  $L^*a^*b^*$  is well defined, perceptually linear, and is a superset of other traditional color spaces (such as CMY, 10    RGB, and HSV).

          The Printer Module must therefore be capable of converting  $L^*a^*b^*$  images to the particular peculiarities of its CMY color space. However, since the compact printer system allows for connectivity to PCs, it is quite reasonable to also allow highly accurate color matching between screen and printer to be performed on the PC. 15    However the printer driver or PC program must output  $L^*a^*b^*$ .

          Each pixel of a compact printer image is therefore represented by 24 bits: 8 bits each of  $L^*$ ,  $a^*$ , and  $b^*$ . The total image size is therefore 1,361,700 bytes (850 x 534 x 3).

          Each image processing module is able to access the image stored in the Printer 20    Module. The access is either to read the image from the Printer Module, or to write a new image to the Printer Module.

          The communications protocol for image access to the Printer Module provides a choice of internal image organization. Images can be accessed either as 850 x 534 or as 534 x 850. They can also be accessed in interleaved or planar format. When 25    accessed as interleaved, each pixel in the image is read or written as 24 bits: 8 bits each of  $L^*$ ,  $a^*$ ,  $b^*$ . When accessed as planar, each of the color planes can be read or written independently. The entire image of  $L^*$  pixels,  $a^*$  pixels or  $b^*$  pixels can be read or written at a time.

          The Timer Module 60 is used to automate the capture of multiple images with 30    a Camera Module 20, the capture of each image being separated by a specific time interval. The captured images are stored in an on-line Memory Module 30. Any flash requirements are handled by the Camera Module 20, and can therefore be ignored by the Timer Module.

FIG 17 shows a magnified perspective view of the Timer Module 60, as previously described with reference to FIG 6. The optional LCD 62 provides visual feedback. It contains a 2-digit numerical display 68 representing the number of time units between captured images. Three time units are available: seconds, minutes, and hours, represented by s, m, and h LCD segments respectively. A multi-segment thermometer 69 provides an animated countdown between image captures. As shown in FIG 17, the LCD 62 is showing all segments active.

FIG 18 is an exploded perspective view of the Timer Module 60. The LCD 62 is mounted on a flexible printed circuit board (PCB) 300. With reference to FIG 19, also formed on the PCB 300 is a simple microcontroller 351 which is suitably an application specific integrated circuit (ASIC) 350.

In reference to FIG 18, the UNITS button 64 is a double button and operates in the manner of a known rocker switch to increment or decrement the number of time units. Selections made using the UNITS button 64 are communicated to the PCB 300 via contact 301.

The flexible PCB 300 is mounted on a support 303 of chassis molding 302. In the preferred embodiment the PCB 300 is mounted such that the LCD 62 lies substantially parallel with a front face 304 of the support 303. The flexible PCB 300 passes over the support such that the ASIC 350 lies substantially parallel with a back face 305 of the support 303. The flexible PCB 300 passes under the ASIC 350 and extends away from the base 306 of the chassis molding 302.

The contact 301 conforms to a curved edge of the support 303 allowing the base of UNITS button 64 to lie substantially parallel with a side face 310 of the support.

The male bayonet connector 66 comprises a cap molding 307, a latch strip 308 and a plurality of contact strips 309. The upper end of the cap molding is essentially dome-shaped and comprises two holes 311 positioned diametrically opposite each other. The holes 311 are positioned and shaped to receive the folded ends 312 of latch strip 308.

The lower end of the cap molding 307 comprises an elongated section 313 that is shaped to carry contact strips 309. The contact strips extend from the upper end of the cap molding, where they form part of the male connector 66, to the bottom of the elongated section 313. The bottom of the elongated section fits into a recess 314 in



the base 306 of the chassis molding such that the contact strips 309 form part of the female bayonet connector 67.

Raised portions 315 of the contact strips 309 fit into an aperture 316 in the elongated section 313 of the cap molding. Contacts on the flexible PCB 300 mate with the raised portions 315 to make contact with the Serial Bus.

The START/STOP button 63 and the SELECT button 65 are incorporated in a molding 317. A contact in the base of the molding for each button connects with the PCB 300 when one or other of the buttons is pressed.

The internal components of the Timer Module 60 are contained within a metal extrusion 318 that comprises a plurality of apertures. It is clear from FIG 18 the manner in which the buttons 63, 64 and 65, and the male connector 66 protrude from the extrusion through the associated apertures to perform their function.

A fascia molding 319 clips into the aperture 320 and provides a protective cover for the LCD 62.

The Timer Module 60 connects to a compact printer configuration via the male connector 66 or the female connector 67. Either the male or the female bayonet connector joins the Timer Module to the Serial Bus via contact strips 309. Power is provided to the Timer Module from the Printer Module 10 via the Serial Bus or from a separate power module.

Alternatively, the Timer Module 60 may be connected to a compact printer configuration via both the male and female bayonet connectors. An example of this principle is shown in FIG 16 where the Memory Module 30 is connected to the Printer Module 10 via its male connector and is connected to the Communications Module 40 via its female bayonet connector.

The Timer Module 60 must be used in conjunction with a Camera Module 20 and at least one Memory Module 30. The first stage of Timer Module use is therefore to construct a configuration containing at least these Modules. Power may be provided from a power module, a Printer Module 10 or a personal computer through the communications module 40. However, the Modules may be connected in any order. The Modules are joined together using the bayonet connectors as previously described.

The Timer Module queries all the modules in the system to locate the camera module and any number of memory modules. A list is compiled of available memory modules and ranges of available image numbers within those modules. The total

number of available image storage locations N is recorded. The timer then instructs the camera N times to capture images and transfer the images to the memory module until all storage locations are full. The timer waits an elapsed time between each image capture. The elapsed time is set by the user using the buttons or commanded from an external source using the timer module command set. The Timer Module commands the transfer of the captured image from the camera module to the memory module using the TransferImage command described above.

Once the START button 63 is pressed, the Timer Module 60 counts down the specified time, and then instructs the Camera Module 20 to capture and transfer an image to the appropriate Memory Module 30.

When only a single Memory Module is present in the configuration, after the START button 63 is pressed, the Timer Module continues to capture an image after every time interval has elapsed and transfer each captured image to the single Memory Module until that Memory Module is full.

When there are multiple Memory Modules in the configuration, the process is the same as for the single Memory Module, except that the Memory Modules are filled up one by one until all Memory Modules have been filled. The first Memory Module to be written to is the one physically closest to the Camera Module 20, and the last Memory Module to be written to is the one physically furthest from the Camera Module.

Two tasks need to be accomplished before the Timer Module 60 can be activated to begin a countdown. The duration of the time interval between the capture of each image must be set and the initial image number on the Memory Module(s) must be set. These tasks can be performed in any order.

The duration of the time interval between the capture of each image is set by selecting the time unit using the SELECT button 65 and then selecting the number of those units using the UNITS button 64. For example, a time interval of 30 seconds can be accomplished by selecting the seconds units, and then adjusting the number to 30. A time interval of 15 minutes can be accomplished by selecting the minutes units and then adjusting the number to 15. The Timer Unit maintains a context for each unit so as to minimize the change required by the user.

Alternatively the duration can be set from a personal computer or another module using the Timer Module command set.

The first image to be written to a specific Memory Module will be written to the current image number displayed on that Memory Module. The image number is then incremented. The image number is set by means of the SELECT button 35 on the Memory Module. Setting the initial image number before the Timer Module is activated lets the user specify how many images each Memory Module will capture. For example, setting a 48 image Memory Module to 40 allows the capture of 9 images: images 40, 41, 42, 43, 44, 45, 46, 47, and 48. Once the image count reaches 48 it stops and no further images are written to that Memory Module. If multiple Memory Modules are present, the Memory Module next closest to the Camera Module will be written to.

Once the two preliminary tasks have been done, the Timer Module's START/STOP button 63 can be pressed to start the Timer Module. Pressing the START/STOP button 63 a second time stops the Timer Module. While the Timer Module is actively counting down, feedback is given in two ways. Firstly, the time unit LCD segment (s, m or h) flashes on and off (1 second on, 1 second off) to let a user know the countdown is active. Secondly, a multi-segment thermometer 69 provides an animated countdown of the proportion of time elapsed until the next image capture time.

As mentioned above, the Timer Module contains an integrated circuit 350. The elements of the integrated circuit 350 are shown in FIG 19. These elements include a simple microcontroller 351, a Serial Bus Interface 352, a small scratch RAM 353 for storing timing instructions and a small program memory 354. State information is limited to the current time unit setting (seconds, minutes, hours), the number of time units (2-60 seconds, 1-60 minutes, 1-96 hours), whether the timer is active (yes, no), the time until the next image capture (2-60s, 1-60m, 1-96h), the current Camera Module target, the current Memory Module target and the next Memory Module image number. Instructions are limited to setting the time units, setting the number of time units, starting and stopping the timer.

Also included in the ASIC is a memory decoder 355 and parallel interface 356 (that communicates with the LCD and various buttons). A Joint Test Action Group unit 357 may be included for self-test purposes. In some circumstances a clock 358 and crystal oscillator 359 may be required.

The combination of the Memory Module 30 with a Camera Module 20 constitutes a digital imaging system. This combination allows an image captured by

5

PP13US

## CLAIMS

1. A timer module comprising:  
a body;  
control means within said body that automates the capture of multiple images  
5 by a camera module, the capture of each image being separated by a specific  
time interval;  
at least one connection means incorporated in said body for connecting said  
timer module to a bus providing power and data between said timer module  
and said camera module.
- 10 2. The timer module of claim 1 wherein said control means automates storage of  
images in at least one memory module connected to said bus.
3. The timer module of claim 1 having two or more connection means  
incorporated in said body, at least one connection means connecting said timer  
module to at least said camera module and at least one memory module.
- 15 4. The timer module of claim 1 having two or more connection means  
incorporated in said body including a first connection means connectable to  
said camera module and a second connection means connectable to further  
modules in a stackable manner.
- 20 5. The timer module of claim 1 having two or more connection means  
incorporated in said body, said two or more connection means providing  
through connection to said camera module and one or more further modules of  
a compact printer system.
6. The timer module of claim 1 further comprising a LCD within said body, said  
LCD being connected to said control means and providing information about  
25 said time intervals.
7. The timer module of claim 6 wherein said LCD is capable of displaying a  
plurality of icons indicative of a unit and a number of said units of said  
specific time interval and a proportion of said time interval elapsed until a next  
image capture time.
- 30 8. The timer module of claim 1 wherein said control means is an application  
specific integrated circuit comprising a microcontroller and clock.
9. The timer module of claim 1 wherein said control means further comprises  
information about an image number and a target memory module for storage  
of said captured images.

10. The timer module of claim 1 wherein said at least one connection means comprises a male bayonet fitting providing physical connection between said timer module and said camera module.
11. The timer module of claim 1 wherein said at least one connection means comprises a female bayonet fitting providing physical connection between said timer module and said camera module.
12. The timer module of claim 1 further comprising a SELECT button to select a unit of said specific time interval.
13. The timer module of claim 1 further comprising a UNITS button to select a number of units of said specific time interval.
14. The timer module of claim 1 further comprising a START/STOP button to start and stop a countdown of at least one of said specific time intervals.
15. The timer module of claim 1 wherein said bus is a Serial Bus.
16. A timer module for a compact printer system comprising:  
a body;  
control means within said body that automates the capture of multiple images by a connected camera module, the capture of each image being separated by a specific time interval;  
at least one connection means incorporated in said body for connecting said effects module to a bus providing power and data between said effects module and said camera module.
17. The timer module of claim 16 having two or more connection means incorporated in said body including a first connection means connectable to said camera module and a second connection means connectable to one or more memory modules in a stackable manner, said control means automating storage of said images in said one or more memory modules.
18. A method of automating the capture of multiple images by a camera module in a compact printer system comprising the steps of:  
setting a specific time interval between said capture of said images,  
setting an initial image number on a connected memory module,  
starting said image capture process.

## ABSTRACT

A timer module useful in a digital imaging system such as a compact printer system. The timer module includes a control means that automates the capture of multiple images by a connected camera module. The images are stored in a connected memory module. The capture of each image is separated by a specific time interval. The time interval is selected by a plurality of buttons incorporated in the timing module and feedback may be provided via a LCD.

The timer module incorporates two connection means. One or other of the connecting means connects to corresponding connection means on the camera module, the memory module or a printer module. The connection means includes a physical connection and a logical connection. The logical connection is a serial bus that communicates power and data.

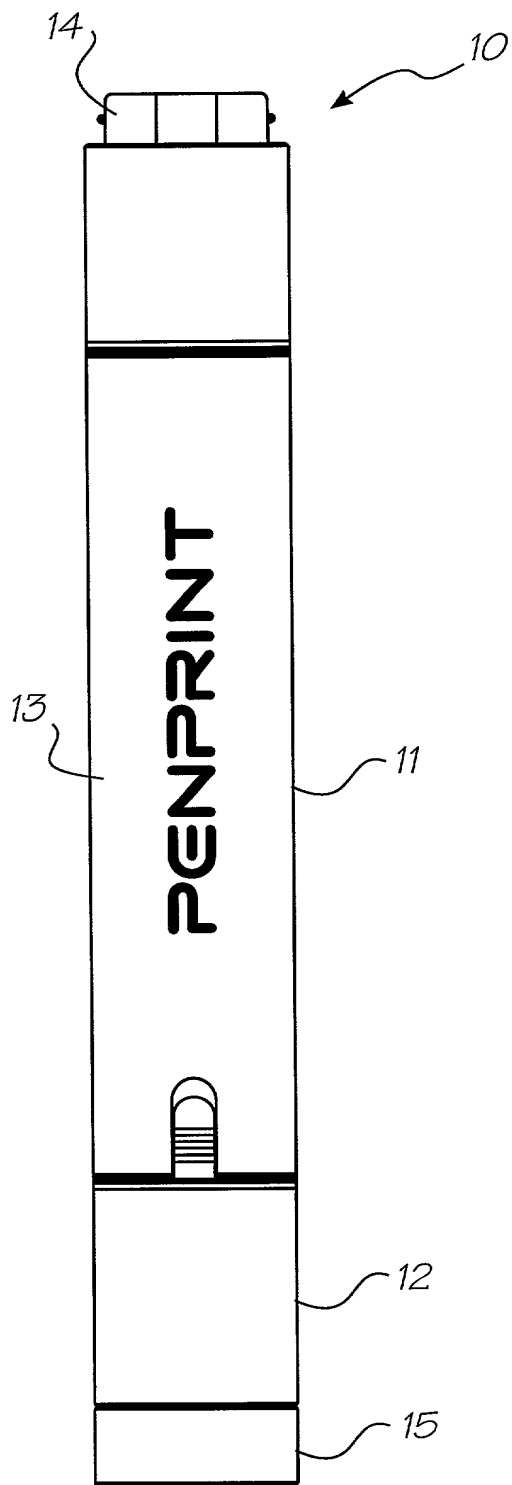


FIG. 1

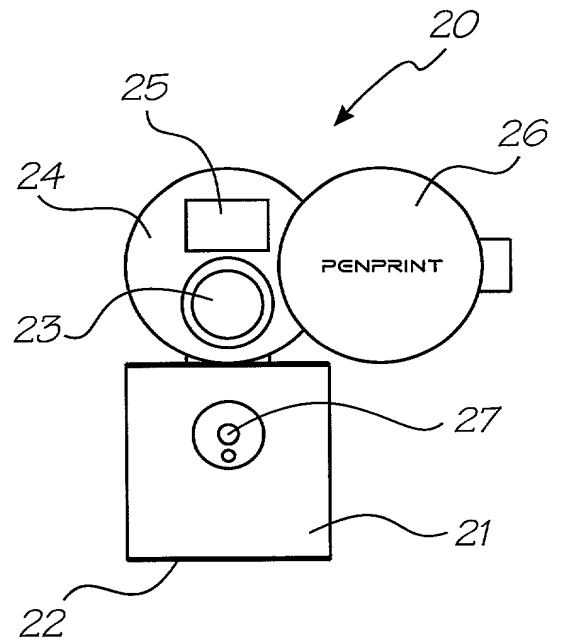


FIG. 2

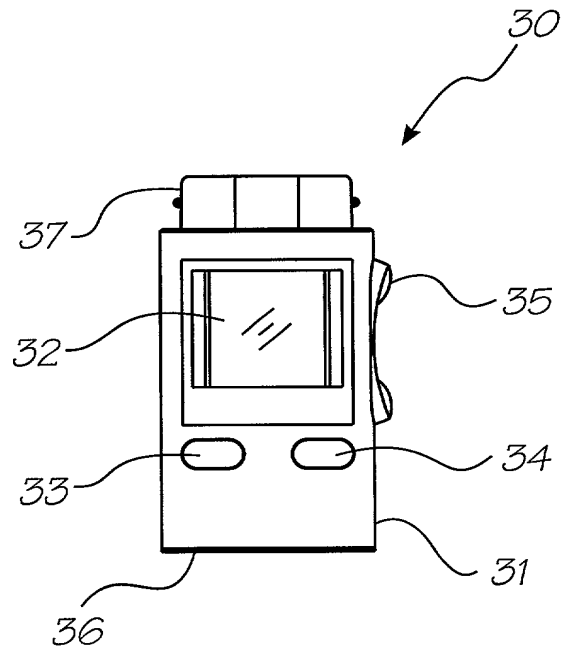


FIG. 3



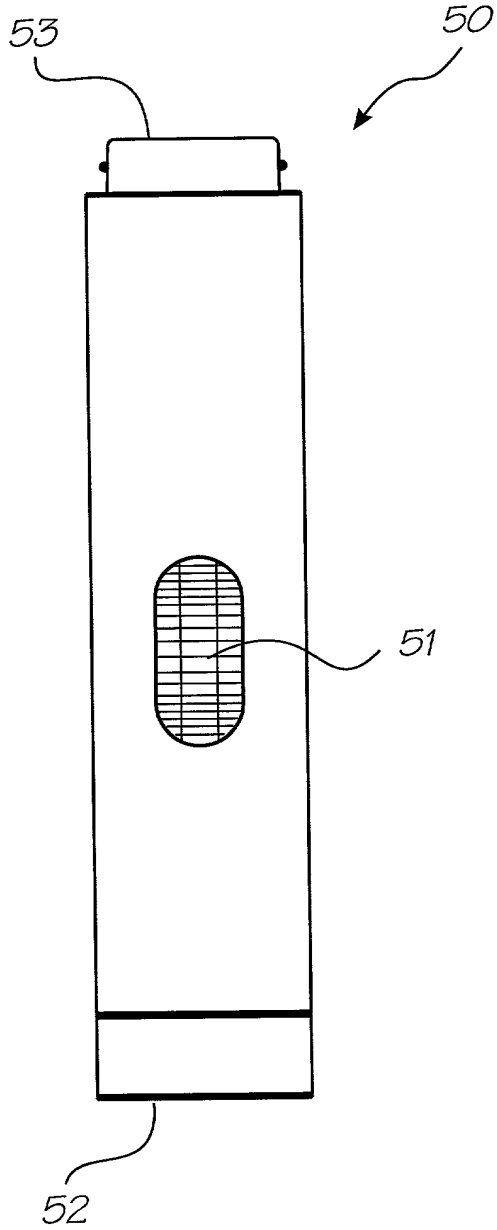


FIG. 5

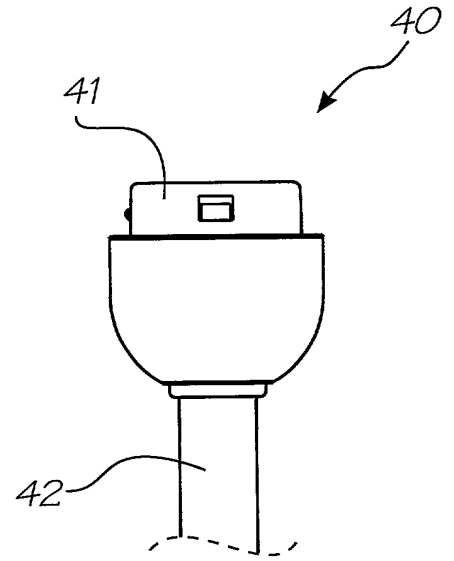


FIG. 4

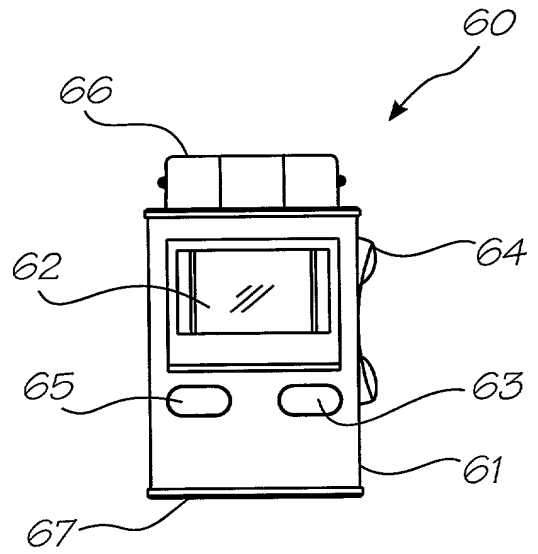


FIG. 6

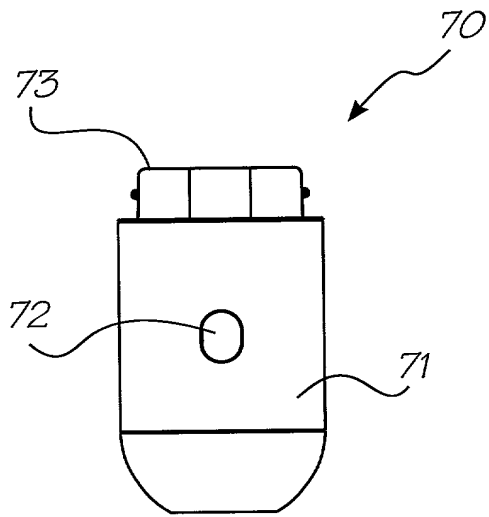


FIG. 7

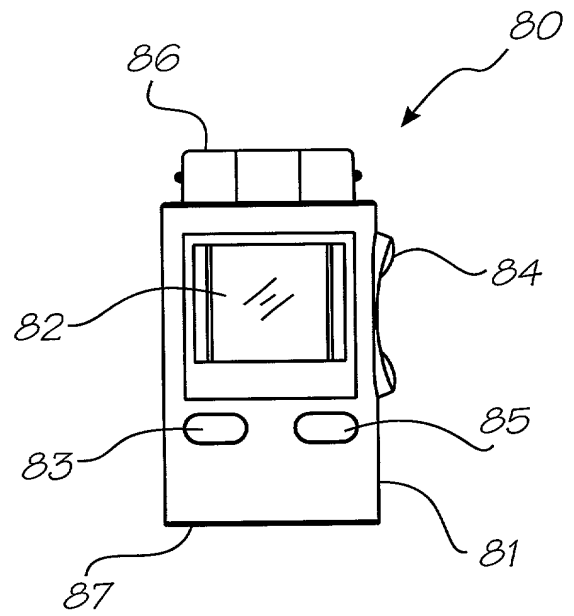


FIG. 8

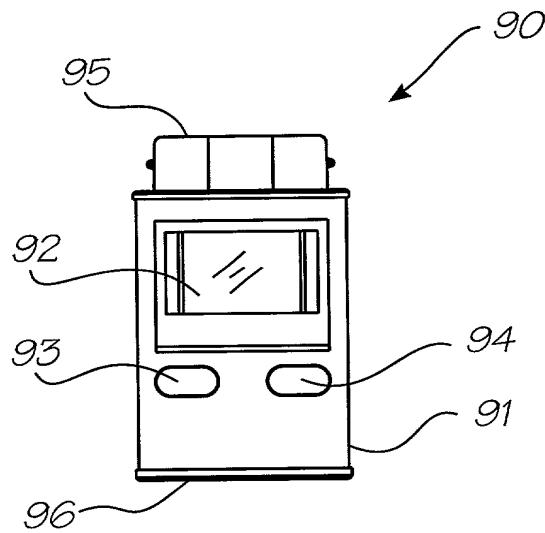


FIG. 9

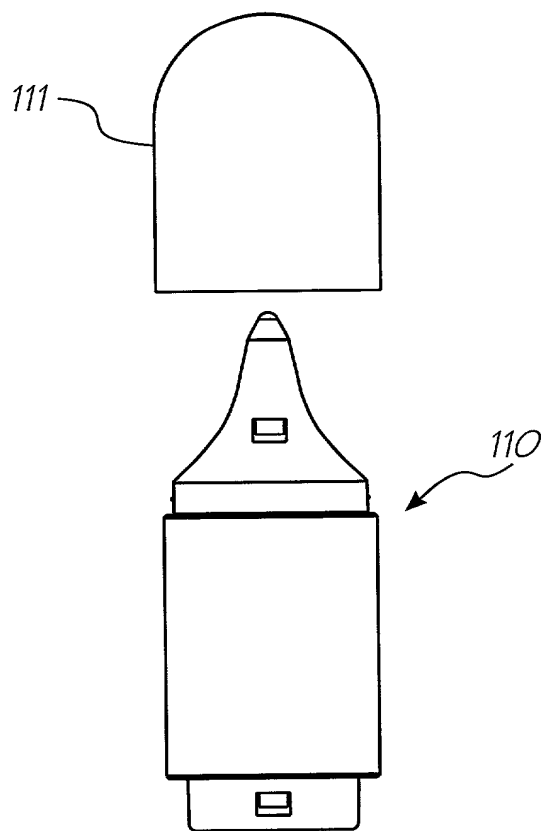


FIG. 11

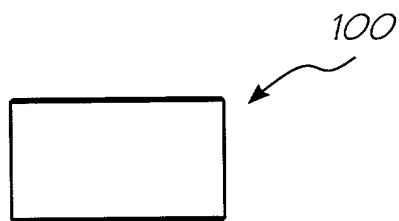


FIG. 10

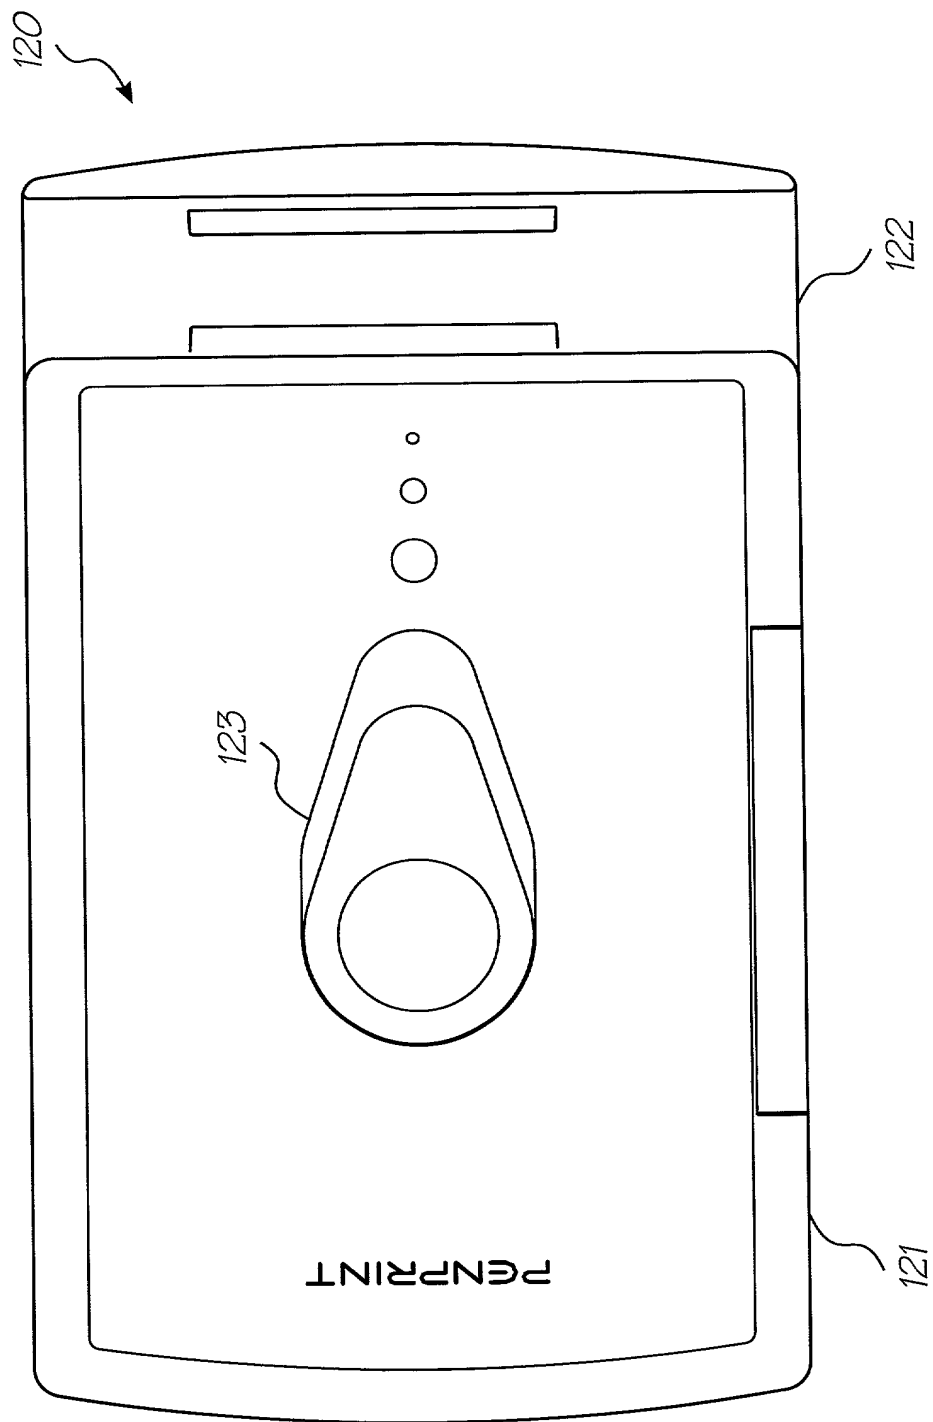


FIG. 12

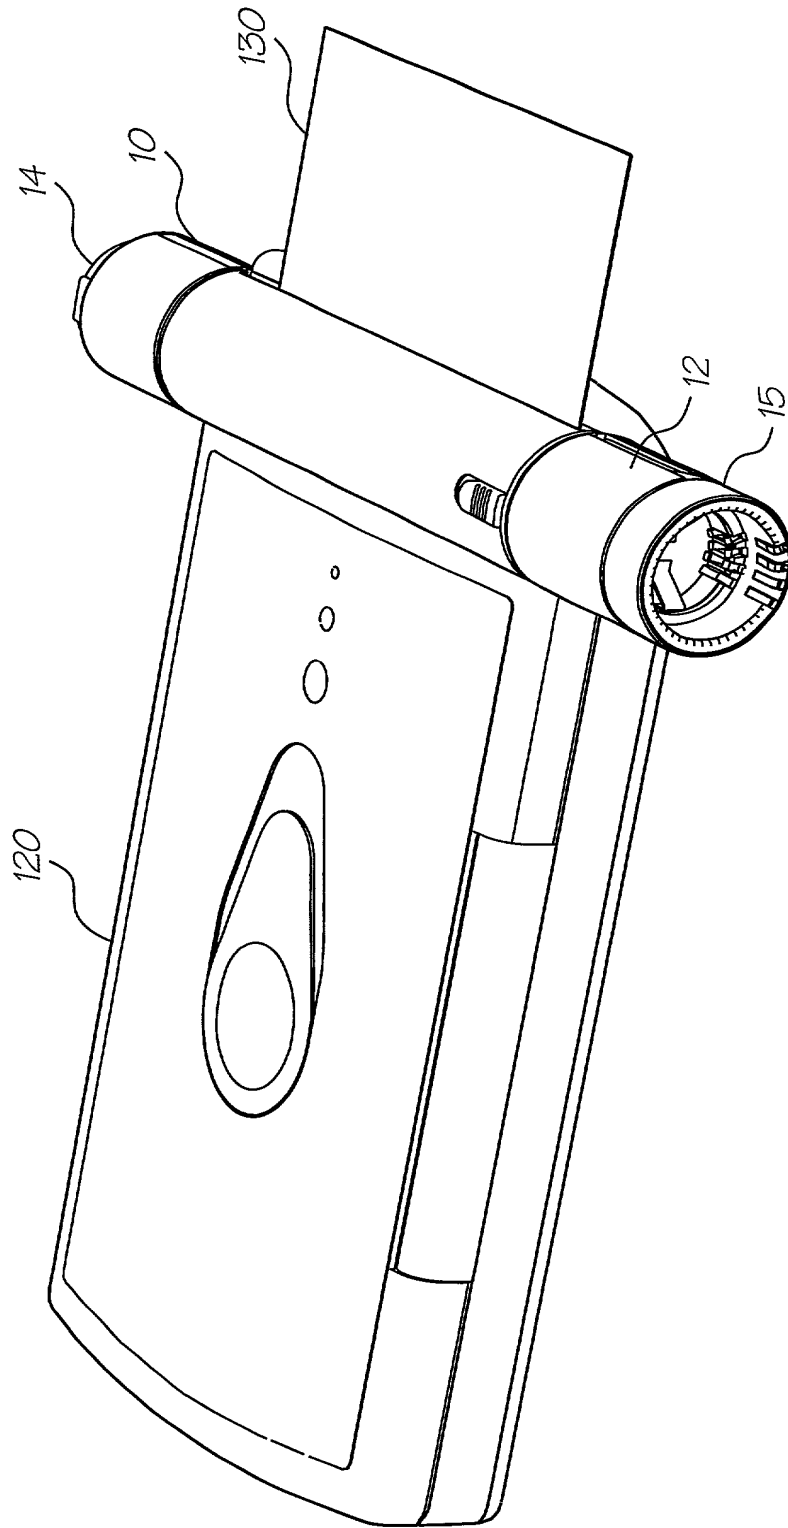


FIG. 13

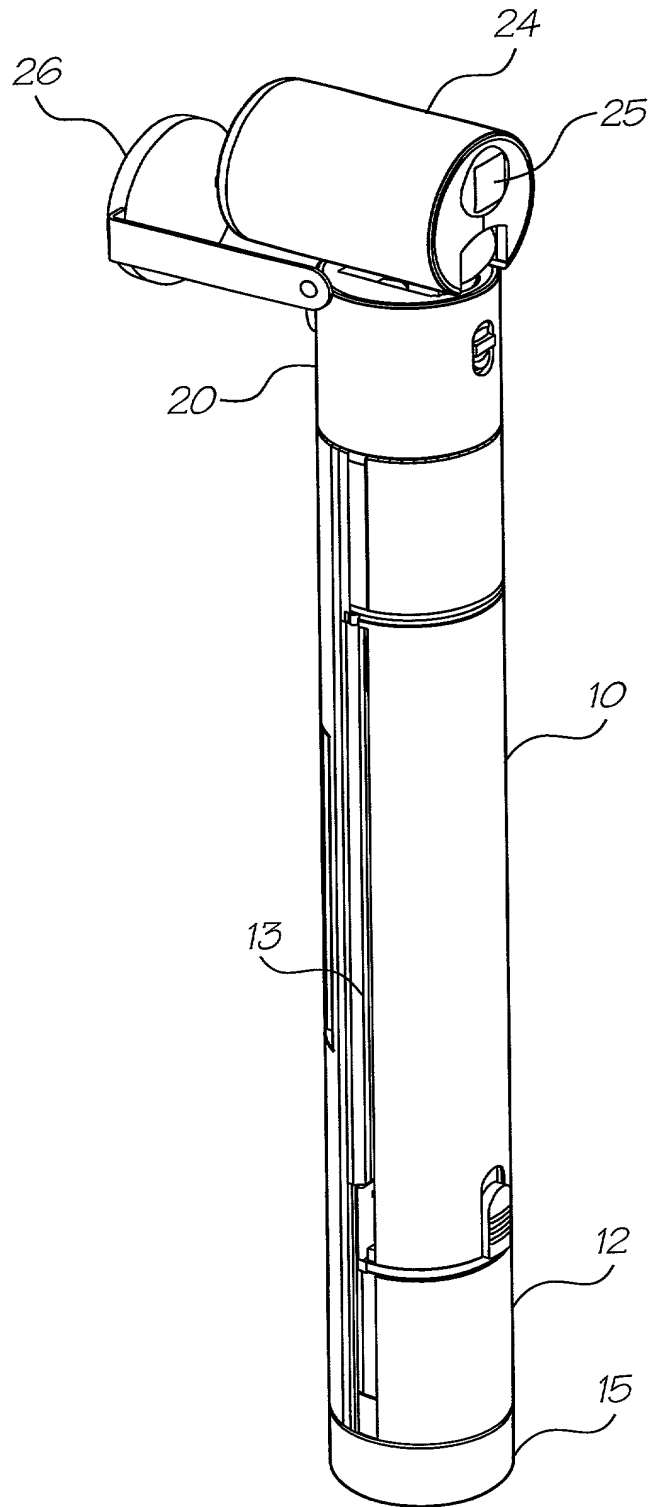


FIG. 14

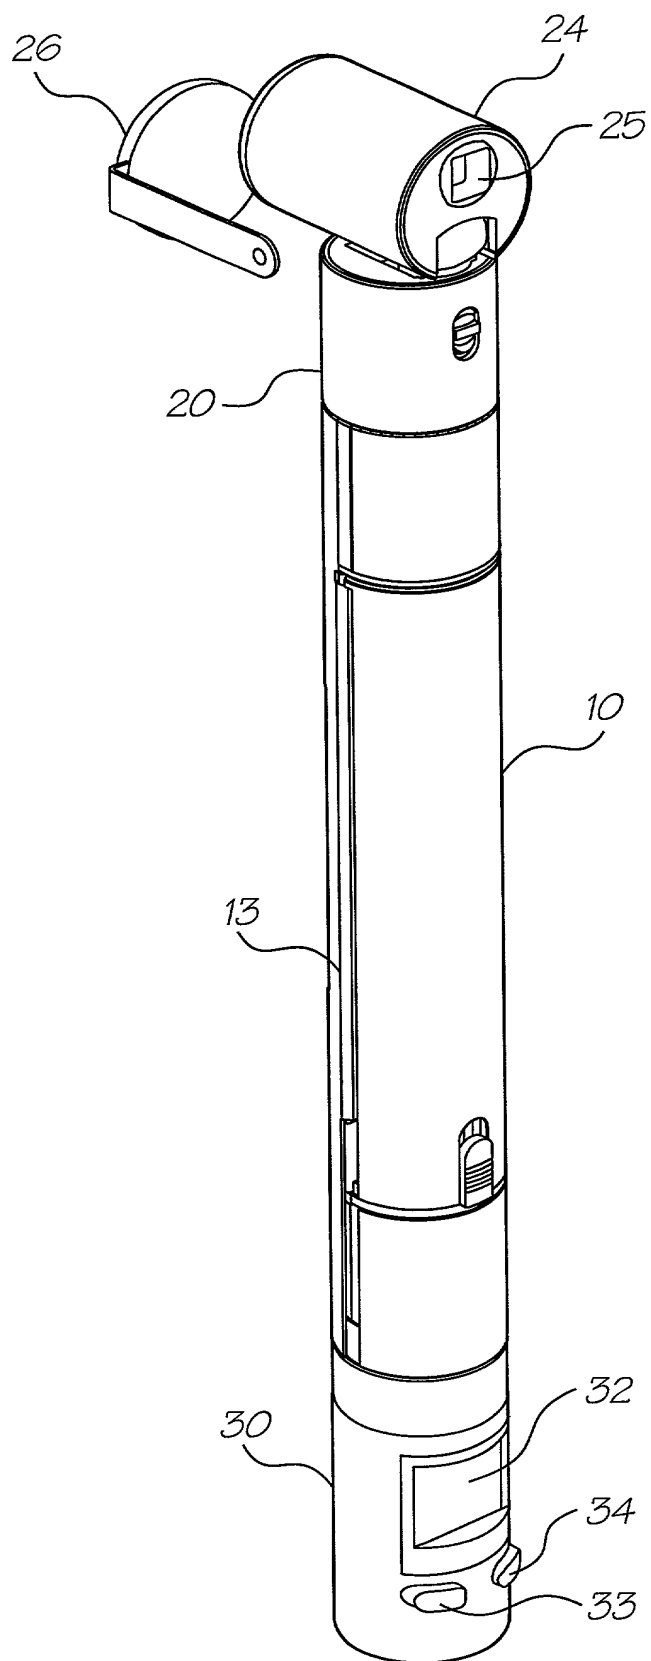


FIG. 15

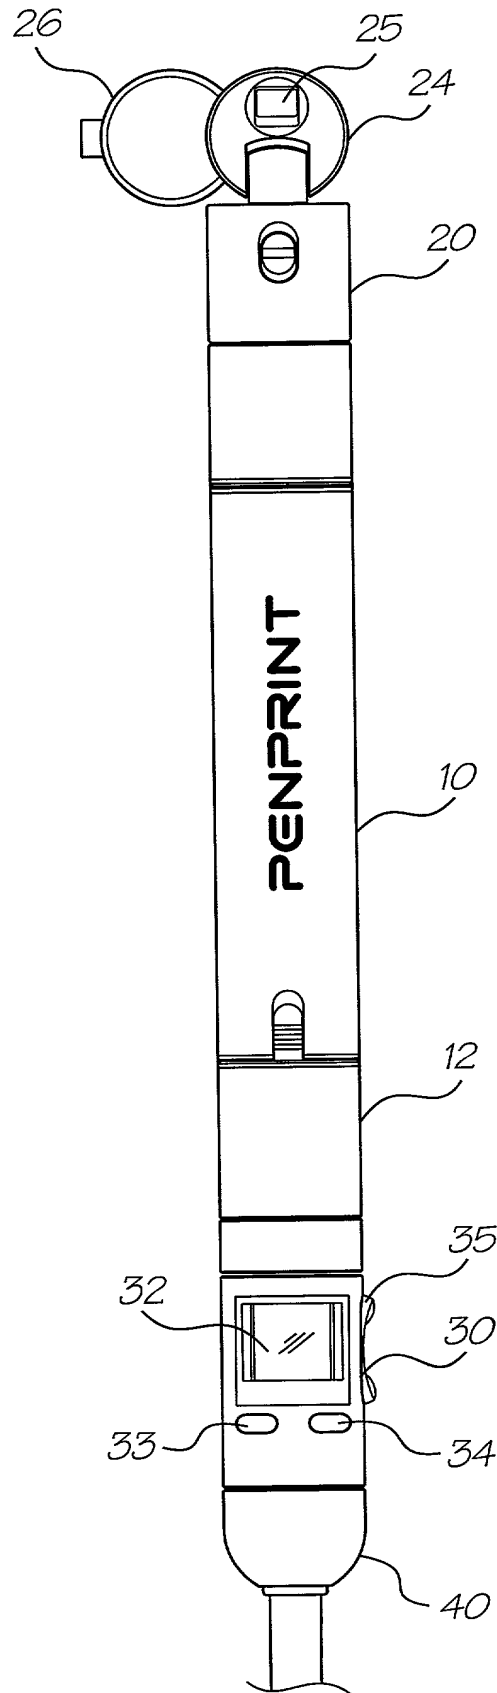


FIG. 16



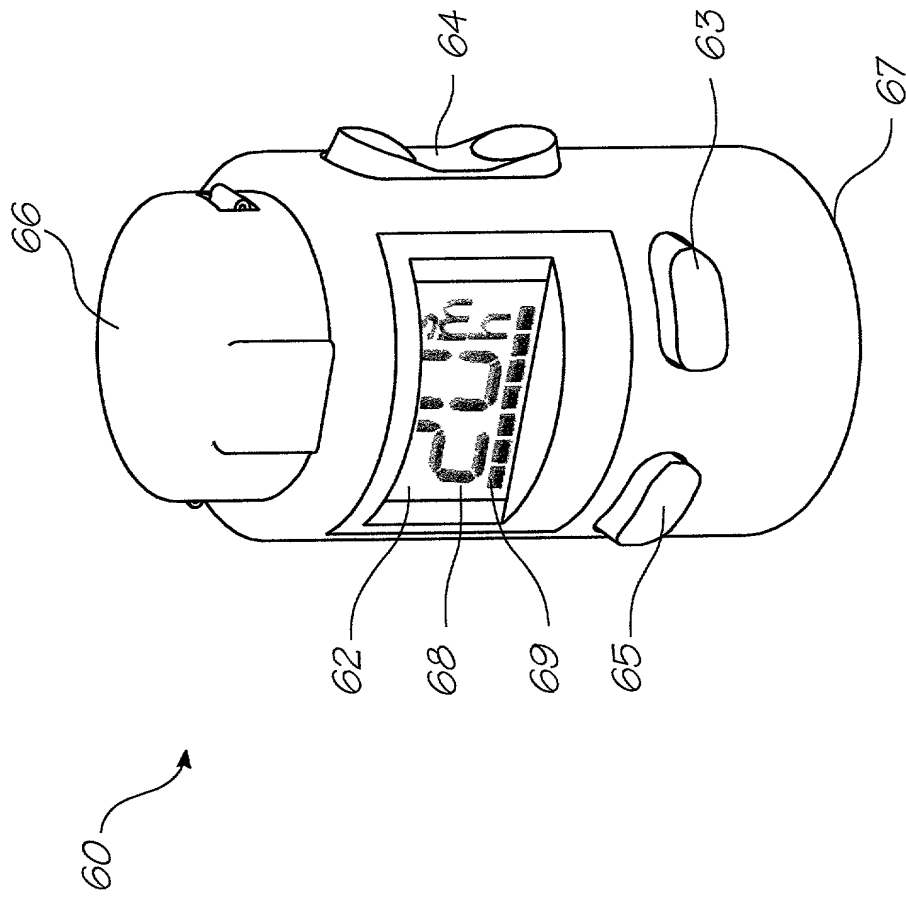


FIG. 17

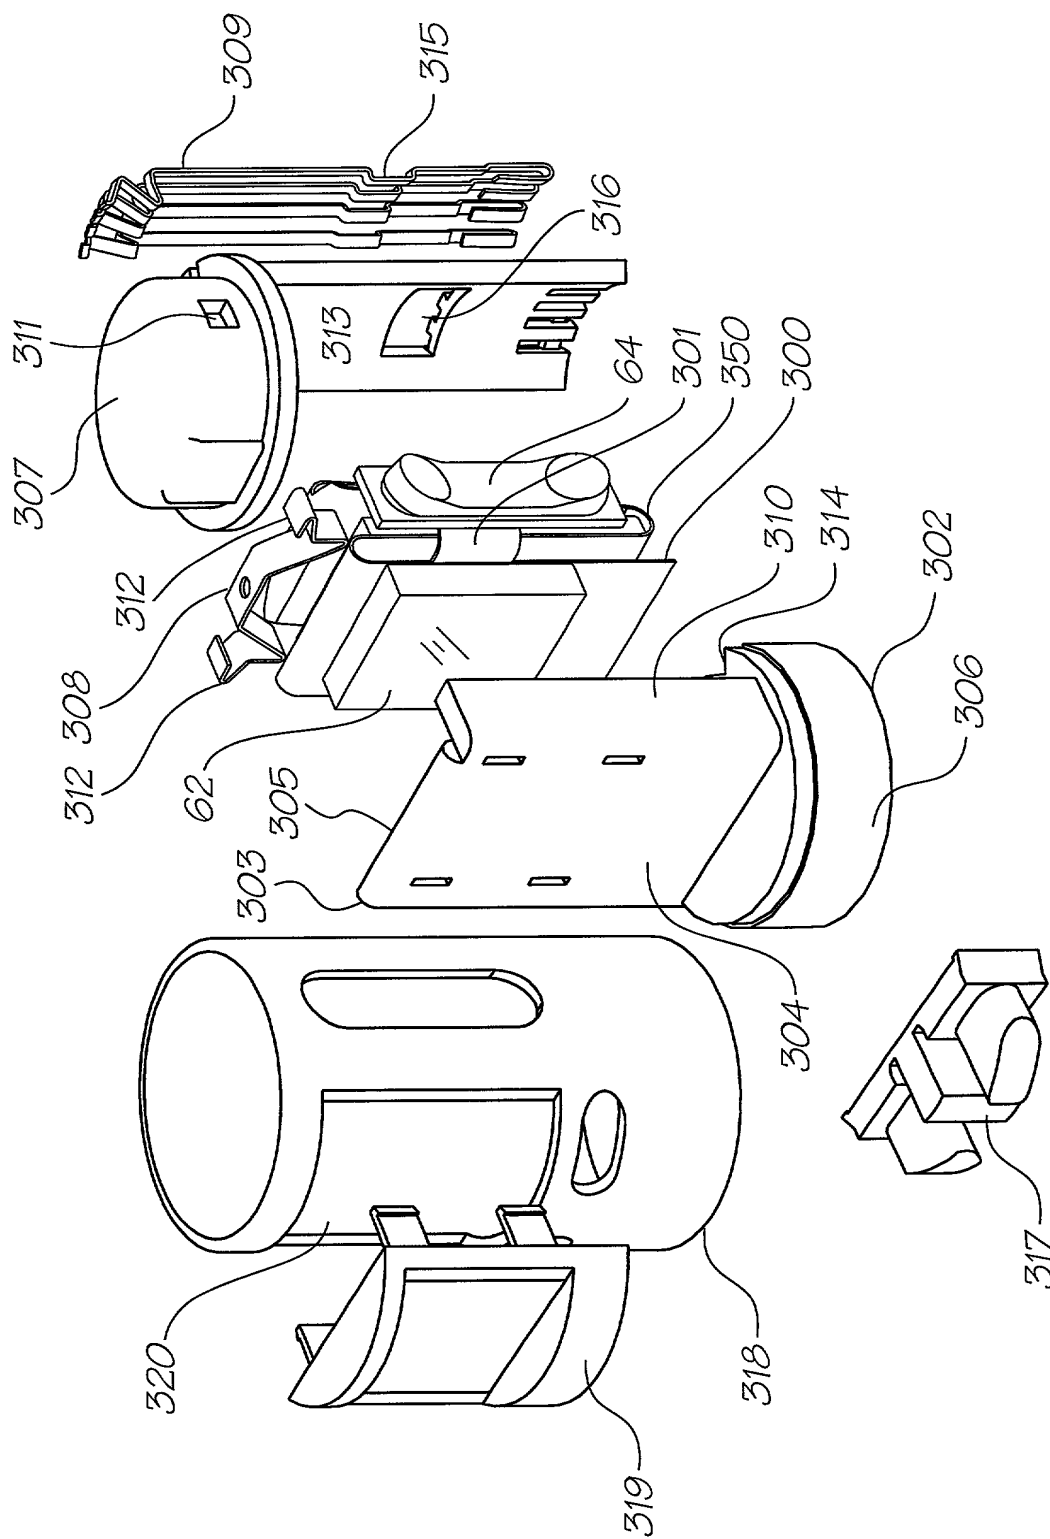


FIG. 18

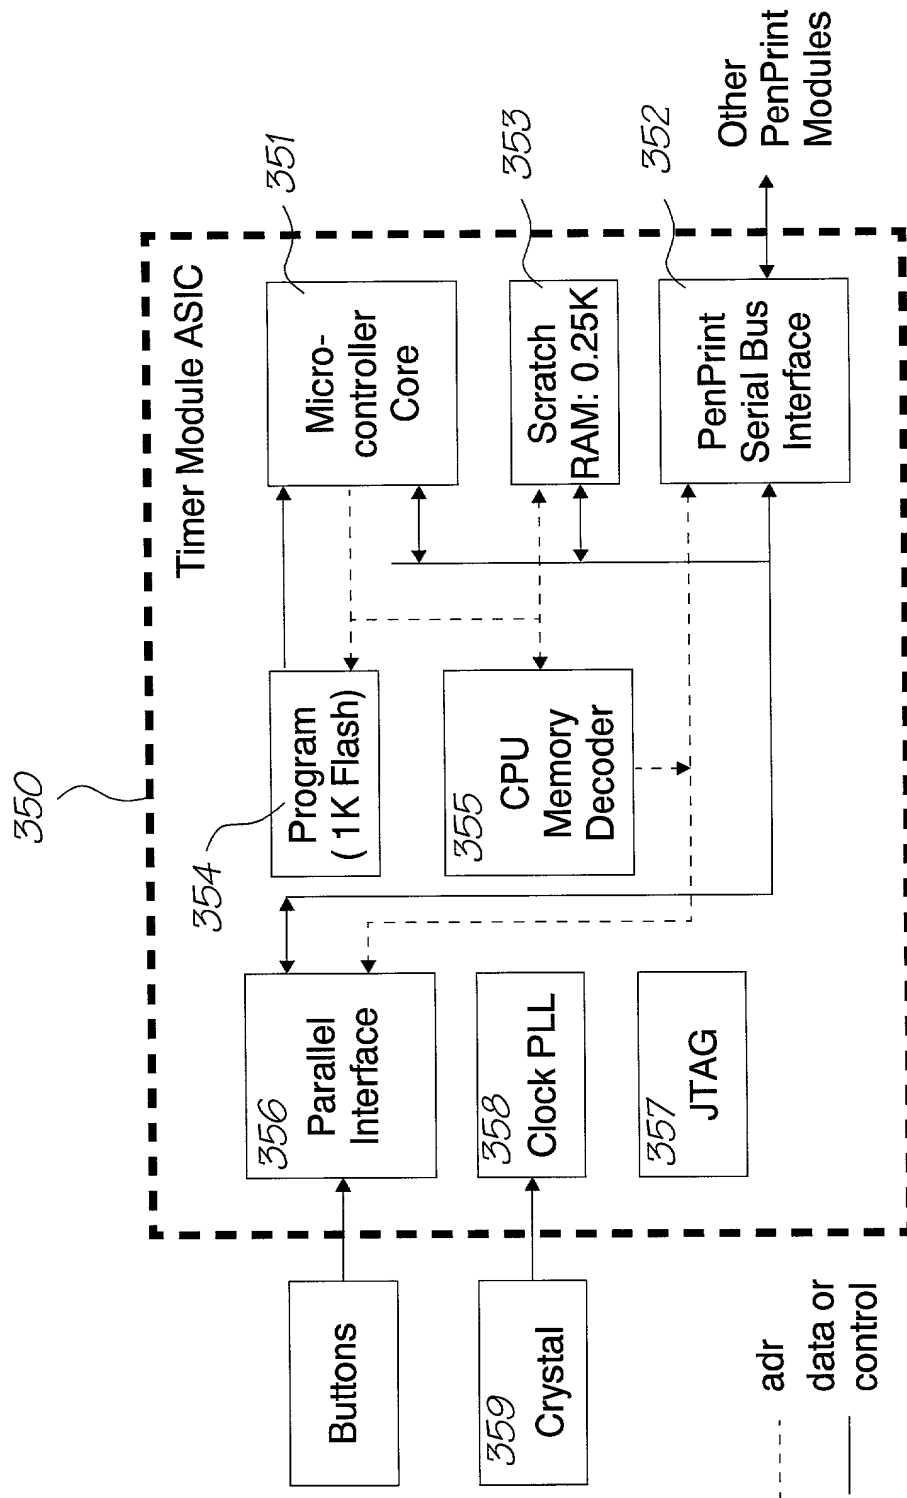


FIG. 19

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)  
Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION</b> <b>(37 CFR 1.63)</b>  <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing      OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	<b>Attorney Docket Number</b>	PP13US
	<b>First Named Inventor</b>	Kia Silverbrook
	<b>COMPLETE IF KNOWN</b>	
	<b>Application Number</b>	/
	<b>Filing Date</b>	
	<b>Group Art Unit</b>	
	<b>Examiner Name</b>	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**TIMER MODULE FOR COMPACT PRINTER SYSTEM**

the specification of which (Title of the Invention)

☒ is attached hereto  
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
PQ0560	Australia	05/25/1999	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Washington, DC 20231

Please type a plus sign (+) inside this box → ☐Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION — Utility or Design Patent Application**

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer  
Number Bar Code  
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.


Direct all correspondence to: ☒ Customer Number or Bar Code Label  OR ☐ Correspondence address below

Name	Kia Silverbrook				
Address	Silverbrook Research Pty Ltd				
Address	393 Darling Street				
City	Balmain	State	NSW	ZIP	2041
Country	Australia	Telephone	61-2-9818-6633	Fax	61-2-9818-6711

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle if any)	Family Name or Surname
Kia	Silverbrook

Inventor's Signature		Date	May 16, 2000
Residence: City	Balmain	State	NSW
Country	Australia	Citizenship	Australian

Post Office Address	393 Darling Street
---------------------	--------------------

Post Office Address	
---------------------	--

City	Balmain	State	NSW	ZIP	2041	Country	Australia
------	---------	-------	-----	-----	------	---------	-----------

☒ Additional inventors are being named on the \_\_\_\_\_ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (3-97)  
 Approved for use through 9/30/98. OMB 0651-0032  
 Patent and Trademark Office, U S DEPARTMENT OF COMMERCE  
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION**

**ADDITIONAL INVENTOR(S)**  
**Supplemental Sheet**  
 Page 1 of 1

<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
Simon Robert				Walmsley			
<b>Inventor's Signature</b>	<i>Simon Walmsley</i>					<b>Date</b>	May 16, 2000
<b>Residence: City</b>	Epping	<b>State</b>	NSW	<b>Country</b>	Australia	<b>Citizenship</b>	Australian
<b>Post Office Address</b>	Unit 3, 9 Pembroke Street						
<b>Post Office Address</b>							
<b>City</b>	Epping	<b>State</b>	NSW	<b>ZIP</b>	2121	<b>Country</b>	Australia
<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
<b>Inventor's Signature</b>						<b>Date</b>	
<b>Residence: City</b>		<b>State</b>		<b>Country</b>		<b>Citizenship</b>	
<b>Post Office Address</b>							
<b>Post Office Address</b>							
<b>City</b>		<b>State</b>		<b>ZIP</b>		<b>Country</b>	
<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle [if any])				Family Name or Surname			
<b>Inventor's Signature</b>						<b>Date</b>	
<b>Residence: City</b>		<b>State</b>		<b>Country</b>		<b>Citizenship</b>	
<b>Post Office Address</b>							
<b>Post Office Address</b>							
<b>City</b>		<b>State</b>		<b>ZIP</b>		<b>Country</b>	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

